


HNJ6 外形尺寸图

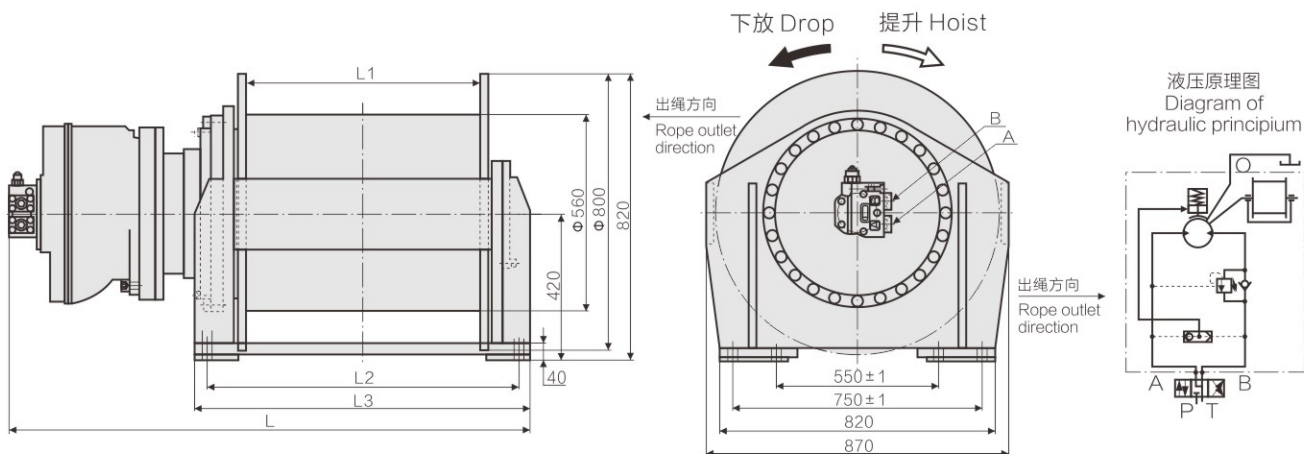

型 号 Model	第一层 First layer		Displacement (ml/r)	Difference of working pressures (Mpa)	Oil supply flux	Steel wire diameter (mm)	Rope layers	Rope capacity (m)	液压马达型号 Hydraulic motor	行星减速器型号 Model of planetary reducer	重量 Weight (kg)
	拉力(KN) Pull force	绳速(m/min) Rope speed									
HNJ6 -100-130-26-ZP-1	100	0.08-28	14049	15.4	0.60-238	26	1	38	HGM5-2000	C6 i=7	1200
							2	81			
							3	127			
HNJ6 -110-100-28-ZP-1	110	0.07-25	16725.5	14.3	0.61-252	28	1	28	HGM6-3000	C6 i=5.5	1300
							2	59			
							3	94			
HNJ6 -120-150-28-ZP-2	120	0.07-31	13821.5	18.9	0.50-258	28	1	44	HGM6-2500	C6 i=5.5	1450
							2	93			
							3	146			
HNJ6 -125-110-30-ZP-2	125	0.07-25	16725.5	16.3	0.61-251	30	1	32	HGM6-3000	C6 i=5.5	1450
							2	69			
							3	109			
HNJ6 -130-165-30-ZP-3	130	0.07-25	16725.5	17.0	0.61-251	30	1	49	HGM6-3000	C6 i=5.5	1600
							2	103			
							3	163			
HNJ6 -140-165-30-ZP-3	140	0.07-25	16725.5	18.3	0.61-251	30	1	49	HGM6-3000	C6 i=5.5	1600
							2	103			
							3	163			
HNJ6 -145-210-30-ZP-4	145	0.07-25	16725.5	18.9	0.61-251	30	1	61	HGM6-3000	C6 i=5.5	1780
							2	129			
							3	204			
HNJ6 -150-210-30-ZP-4	150	0.07-25	16725.5	19.6	0.61-251	30	1	61	HGM6-3000	C6 i=5.5	1780
							2	129			
							3	204			

注：1、总排量为卷筒每转一转的供油量。

2、供油流量是泵的理论流量，即在考虑系统容积率为0.9的情况下计算所得。

3、容绳量为绞车的理论容绳量，实际可行的有效容绳量应考虑保留钢丝绳3米，以防绳头脱出。

4、工作压差为绞车工作时A、B两进出口的压力差。

外形尺寸 Contour dimension

基础 Foundation	Dimension	L1(mm)	L2(mm)	L3(mm)	L(mm)
1		550	776	846	1381
2		678	904	974	1509
3		800	1026	1096	1631
4		1000	1226	1296	1831

配流器选型 Model selection of distributor

流量 Flux	规格 Type	型 号 Model	A口	B口
0-40		D60101	M22 × 1.5	M22 × 1.5
40-90		D120101	Φ25	Φ25
90-150		D240101	Φ25	Φ25
150-240		D480101	Φ40	Φ40